


ELECTRIC STEAM GENERATORS · SERIES CDK-DR-H-5

CDK-DR-H-5

Code CDK-DR-H-5 · Line Compact · 5 Performance classes · max. 5 bar(g) · max. 288 kg steam/h



Fig.: CDK-DR-H-5

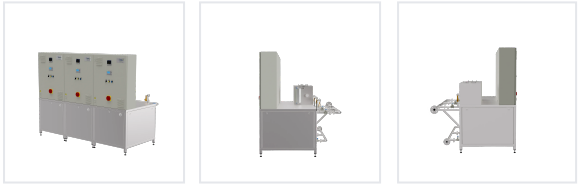

Performance

Specification	CD36K-DR-H-5	CD45K-DR-H-5	CD54K-DR-H-5	CD63K-DR-H-5	CD72K-DR-H-5
Steam Output (kg/h)	144	180	216	252	288
Heat output (kcal/h)	94,816	118,519	142,223	165,927	189,631
Working pressure min. (bar(g))	1.0	1.0	1.0	1.0	1.0
Working pressure max. (bar(g))	5.0	5.0	5.0	5.0	5.0
Max. operating pressure (bar(g))	5.8	5.8	5.8	5.8	5.8
Max. Steam Temperature (°C)	158.8	158.8	158.8	158.8	158.8

Electrical ratings

Specification	CD36K-DR-H-5	CD45K-DR-H-5	CD54K-DR-H-5	CD63K-DR-H-5	CD72K-DR-H-5
Operating Voltage (V)	400	400	400	400	400
Frequency (Hz)	50	50	50	50	50
Phases	3+PE	3+PE	3+PE	3+PE	3+PE
Heating Output (kW)	3× 36	3× 45	3× 54	3× 63	3× 72
Heating element arrangement	3x	3x	3x	3x	3x
Total Connected Load (kW)	111	138	165	192	219
Control voltage (V DC)	24	24	24	24	24
Total rated current (A)	3× 54	3× 67	3× 80	3× 92	3× 106
Fusing (site-supplied) (A)	3× 63	3× 80	3× 100	3× 100	3× 125
Minimum cross-section (mm ²)	3x 4x25,0	3x 4x35,0	3x 4x35,0	3x 4x35,0	3x 4x50,0

Mechanical Connections

Specification	CD36K-DR-H-5	CD45K-DR-H-5	CD54K-DR-H-5	CD63K-DR-H-5	CD72K-DR-H-5
Steam Line	Flansch DN25	Flansch DN25	Flansch DN25	Flansch DN32	Flansch DN32
Water Inlet	AG R1/2"	AG R1/2"	AG R1/2"	AG R1/2"	AG R1/2"
Blowdown valve	Flansch DN25	Flansch DN25	Flansch DN25	Flansch DN25	Flansch DN25
Safety valve	Flansch DN32	Flansch DN32	Flansch DN32	Flansch DN32	Flansch DN32
Condensate safety valve	IG 1/2"	IG 1/2"	IG 1/2"	IG 1/2"	IG 1/2"
Condensate steam line	IG 1/2"	IG 1/2"	IG 1/2"	IG 1/2"	IG 1/2"
Tank overflow / drain	AG G3/4"	AG G3/4"	AG G3/4"	AG G3/4"	AG G3/4"
Tank condensate inlet	IG G1/2"	IG G1/2"	IG G1/2"	IG G1/2"	IG G1/2"
Flash steam	IG G3/4"	IG G3/4"	IG G3/4"	IG G3/4"	IG G3/4"

Compressed air

Specification	CD36K-DR-H-5	CD45K-DR-H-5	CD54K-DR-H-5	CD63K-DR-H-5	CD72K-DR-H-5
Compressed air min. (bar(g))	5.5	5.5	5.5	5.5	5.5
Compressed air max. (bar(g))	10.0	10.0	10.0	10.0	10.0

Dimensions & Emissions

Specification	CD36K-DR-H-5	CD45K-DR-H-5	CD54K-DR-H-5	CD63K-DR-H-5	CD72K-DR-H-5
Width (mm)	2,400	2,400	2,400	2,400	2,400
Height (mm)	1,850	1,850	1,850	1,850	1,850
Length (mm)	1,000	1,000	1,000	1,000	1,000
Weight (kg)	970	970	970	970	970
Sound Pressure Level (dB(A))	63	63	63	63	63

Equipment levels

Castor frame

For easily changing the installation location.

Special voltage

For example for use abroad.

Heating output selector switch with 3 power levels

Air-conditioned control cabinet

At an ambient temperature above 30°C.

Standards & compliance: CE · Pressure Equipment Directive 2014/68/EU · EMC Directive 2014/30/EU · Low Voltage Directive 2014/35/EU · VDE-compliant wiring