

HAY STEAMERS · SERIES HAY STEAMER

Hay steamer

Code heubedampfer-hb-container · Line hb · 1 Performance class · max. 3 bar(g) · max. 24 kg steam/h

Mobile hay steaming container (DINO HAY STEAMER) with an NDD18-3 electric steam generator: hygienic treatment of hay and straw, neutralises dust, mould spores and bacteria without any loss of feed quality. Up to 24 kg steam/h, four steam lances, integrated water softening and frost monitor. Plug-and-play, Made in Germany.

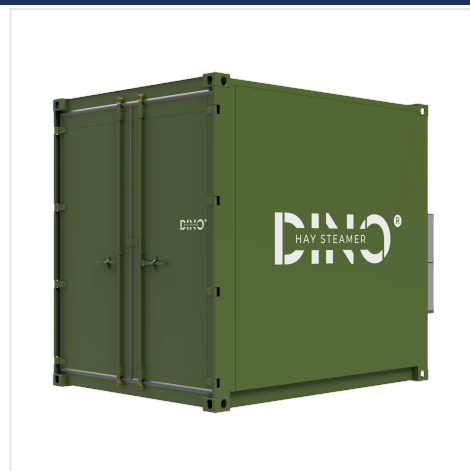


Fig.: Hay steamer

Performance

Specification	HAY STEAMER
Steam Output (kg/h)	24
Working pressure min. (bar(g))	1.0
Working pressure max. (bar(g))	3.0
Max. operating pressure (bar(g))	3.8
Max. Steam Temperature (°C)	144

Electrical ratings

Specification	HAY STEAMER
Operating Voltage (V)	400
Frequency (Hz)	50
Phases	3+PE
Heating Output (kW)	18
Heating element arrangement	4 × 4,5 kW
Total Connected Load (kW)	18.5
Control voltage (V DC)	24
Total rated current (A)	27
Fusing (site-supplied) (A)	32
Connector plug	CEE 32A

Dimensions & Emissions

Specification	HAY STEAMER
Width (mm)	2,450
Height (mm)	2,900
Length (mm)	3,050

Standards & compliance: CE · Pressure Equipment Directive 2014/68/EU · EMC Directive 2014/30/EU · Low Voltage Directive 2014/35/EU · VDE-compliant wiring